

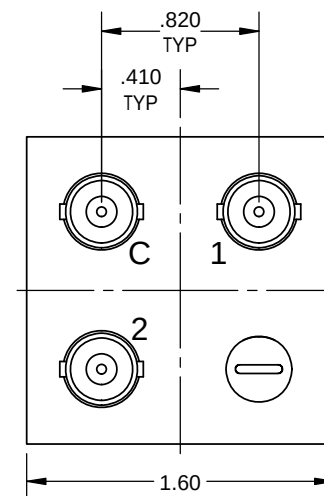


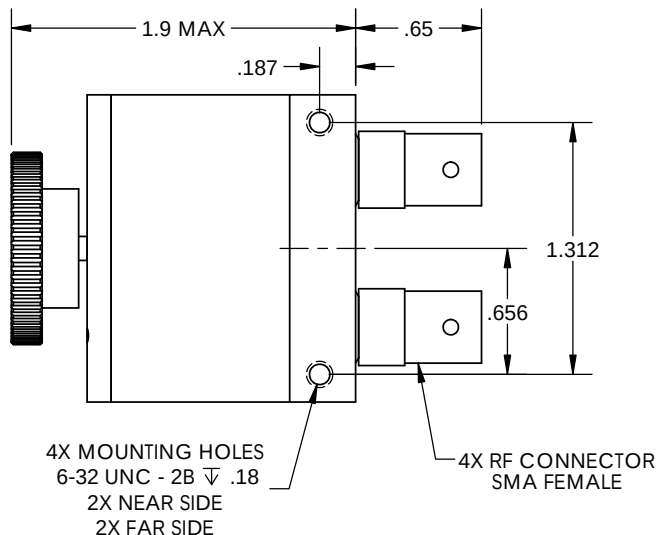

Coaxial Switch - LMC12FBTA3 SPDT, BNC, Manual



Frequency (MHz)	DC to 400	400 to 600	600 to 800	800 to 1000
VSWR (max.)	1.07:1	1.07:1	1.15:1	1.3:1
Insertion Loss (max.)	0.07 dB	0.10 dB	0.12 dB	0.15 dB
Isolation (min.)	80 dB	70 dB	70 dB	70 dB
Power (max.)	150 WCW	75 WCW	65 WCW	50 WCW

RF Impedance:	50 ohms
Material:	Aluminum (RF Assy)
RF Contacts:	Break Before Make
Finish:	Iridite per MIL-DTL-5541, Type II Class 3 Paint Dull Black Enamel
Temperature:	Operating -10°C to +71°C Non-Operating -55°C to +100°C
Humidity:	0 to 95% , No-Condensation

